


**WIRE ADDRESS**

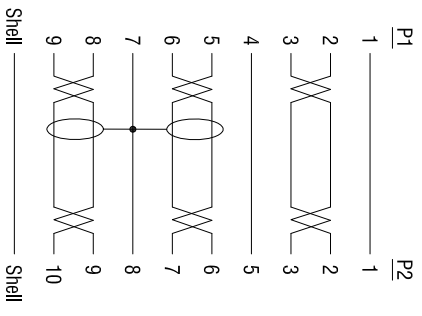

- Electrical Test:
1. 100% TEST OPEN SHORT MIS-WIRE.
  2. CONTACT RESISTANCE: 3Ω MAX.
  3. INSULATION RESISTANCE: 5MΩ MIN.
  4. HI-POT: 300V DC/10MS.
  5. SUPPORT USB 3.2 GEN1 5Gbps

D	45P PVC BLACK		6
C	USB Micro A MALE (Black Insulator, Shell Nickel Plated, Pin Gold Plated 30U <sup>m</sup> )	1	PCS
B	USB A MALE (Blue Insulator, Blue Insulator, Shell Nickel Plated, Pin Gold Plated 30U <sup>m</sup> )	1	PCS
A	UL2725 OR UL2027/6 (28AWG*1P+EAM)*2C+28AWG*1P+24AWG*2C+AEB, OD=5.5mm, BLACK PVC JACKET. (8C Wire)	1	PCS
PRODUCT SPECIFICATIONS		Quantity	Unit
NUMBER	1	2	4

VER.A	REVISE	DATE
D		
C		
B		

USB 3.2 Gen 1 Cable, A - Micro A, M/M, black, 0.8 m		
Item	11.02.8872	
Draw	Sam	Date: 2014.11.28
Approval		
Duty	F16	BOM.NO.:13484
Sample NO.		Drawings of 1 (1) Proportion: 1:1 Unit(mm) A4

