


NOTES:

- Electrical test:
  - 100% open short & miss wire test;
  - Insulation resistance:DC 300V 10M ohm min;
  - Contact resistance:3 ohm max;
  - Displayport practical application Test Pass 4k\*2k@120HZ
- Feature:
  - DP1.4V version
  - Transfer of Audio and Video signal
  - Data transfer rate: 32.4Gbps
  - 7680×4320@60Hz, 3840×2160@120Hz, 4:4:4 8bit
  - Support HDCP2.2/DPCP1.0/ 3D/Dolby MAT/DTS HD/HDR10/DSC1.2
  - Support multi-streaming
- RoHS and Reach Compliant
- Marking:Display Port Cable AWM STYLE 20276 80°C 30V VW-1 RECYCLED
- Storage temperature : -20°C~+80°C  
Operation temperature: -10°C~+60°C
- The proportion for the recycled material is more than 50%.

PIN OUT

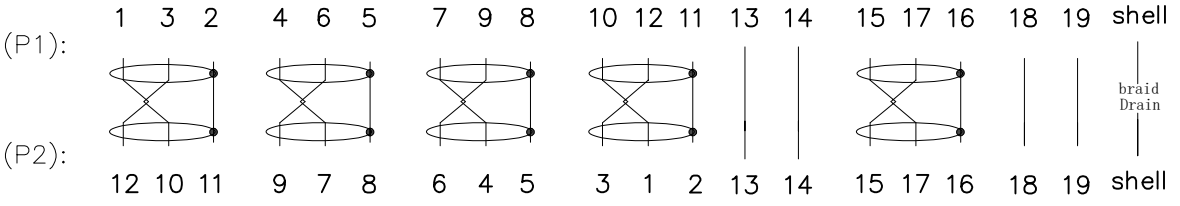

MATERIAL LIST:

③	MOULDING	BLACK RECYCLED PVC	2	
②	CONNECTOR	DP 20P/M SOLDER TYPE, BLACK INSULATION, THE PIN GOLD PLATED , THE SHELL FOR GOLD PLATED	2	
①	CABEL	(28AWG BC*1P+D+AM)*5+30AWG BC*4C+ADB RECYCLED PVC/BLACK JACKET, OD:7.3±0.2MM	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-12-19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.5813	DisplayPort Cable, v1.4, DP - DP, M/M, 8K60, 5m	5000±70
ITEM NO.	DESC.	LENGTH (mm)

