


PIN OUT

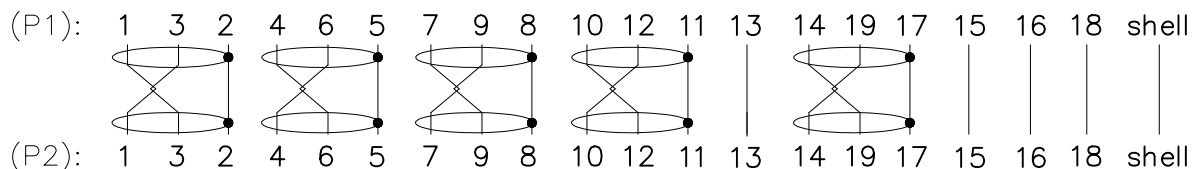

NOTE:

- Electrical test:
  - 100% open short & miss wire test;
  - Insulation resistance:DC 300V 10M ohm min;
  - Contact resistance:3 ohm max;
  - Displayport practical application Test Pass 8k\*4k@60HZ
- Feature:
  - 48Gbps bandwidth
  - 7680×4320@60Hz ,4096\*2160@60hz resolution
  - Supports 3D/HDCP2.2/EDID/HDR/ARC/CEC/EMI/8PCM/Dolby Digital/DTS/MPEG/DVD-Audio/SACD/Dolby Digital Plus/True HD/dts-HD
- RoHS and Reach Compliant
- Cable marking: High Speed HDMI™ Cable With Ethernet RECYCLED
- Operating Temperature:-10℃~60℃  
Storage Temperature:-20℃~80℃
- The proportion for the recycled material is more than 50%.

MATERIAL LIST:

④	Outer mold	Black RECYCLED PVC	2	
③	Inner mold	LDPE	2	
②	HDMI A/M	19P A/M,Black insulation The Pin Gold Plating, the shell for Gold Plating	2	
①	Cable	(28AWG BC*1P+D)*5P+30AWG BC*4C+AL-Foil+D+BRAID RECYCLED PVC OD:7.3±0.2MM	L±T	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-12-19	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

11.45.5905	Ultra HDMI + Ethernet Cable, M/M, 8K60, 5m	5000±70
ITEM NO.	DESC.	LENGTH (mm)

