

## 54-Port Layer 2+ Gigabit Ethernet Managed Switch / 54-Port Layer 2+ Gigabit Ethernet Managed Switch with PoE ES0154 / ES0154P

The ES0154 / ES0154P 54-Port Layer 2+ Gigabit Ethernet Managed Switch is ideal for installation with ATEN KVM over IP products. It simplifies the process of building OT infrastructure with the ATEN KVM over IP series by eliminating the complexities of setup. It provides a high-performance 54-port configuration, a complete array of L2+ features, and advanced functionalities including Layer 3 static route, DHCP server, IPv6 support, and LLDP, making it a versatile solution for enhancing network performance. Both the ES0154 and the ES0154P offer a combination of SFP28 (fiber) and RJ-45 (copper) ports for servicing a range of network needs.

The ES0154 delivers 6 (1G/10G/25G) SFP28 and 48 (10M/100M/1G) RJ-45 ports, while the ES0154P supports 6 (1G/10G/25G) SFP28, 48 (10M/100M/1G) RJ-45 with PoE+ (Support 802.3at/af) ports, and PoE++ (Support 802.3bt) ports (41-48 ports only). The ES0154P is equipped with Power over Ethernet (PoE) functionality, featuring a substantial 740 Watts power budget distributed across its 48 RJ-45 ports. This eliminates the necessity for external power adapters and leads to a substantial reduction in power configuration expenses.

Deploying the ES0154 / ES0154P is quick and hassle-free. Its plug-and-play design eliminates the need for software installation or device configuration. Just connect the transmitters and receivers to the ES0154 / ES0154P using Cat 5e/6 cables, and the system will automatically detect all devices within the same LAN. With a full range of functions to help with optimizing network efficiency, manageability and reliability for their network environment, the ES0154 / ES0154P serves as an ideal network switch solution. It is particularly valuable in applications where connected devices play a critical role in network operation, including OT infrastructure for both SMBs and enterprises.

\*Please visit [www.ATEN.com](http://www.ATEN.com) for compatible products.

ES0154 Front View



ES0154 Rear View



ES0154P Front View




ES0154P Rear View




## Features

- Auto detects ATEN over IP devices
- Supports IGMP snooping fast leave
- Supports flow control
- Supports IGMP v1/v2/v3 Snooping and IGMP v1/v2 Querier
- Supports 48 Gigabit Ethernet ports and 6 SFP28 uplink ports (up to 25Gbps)
- High-performance Gigabit Ethernet L2+ access switch with 396 Gbps switching capacity - significantly improve the responsiveness of applications and file transfer times
- Supports IEEE 802.1w Rapid Spanning Tree Protocol — ensuring a faster recovery from failed links and enhancing overall network stability and reliability
- Comprehensive QoS — allowing the marking, classification, and scheduling of up to four traffic types across the network
- Enhanced Security — Port Security limits the total number of devices using a switch port and protects against MAC flooding attacks
- Supports IPv4, IPv6
- 802.3af PoE / 802.3at PoE+ / 802.3bt PoE++ (41-48 ports only) port configuration and scheduling (ES0154P only)
- Plug-and-play

## Diagram

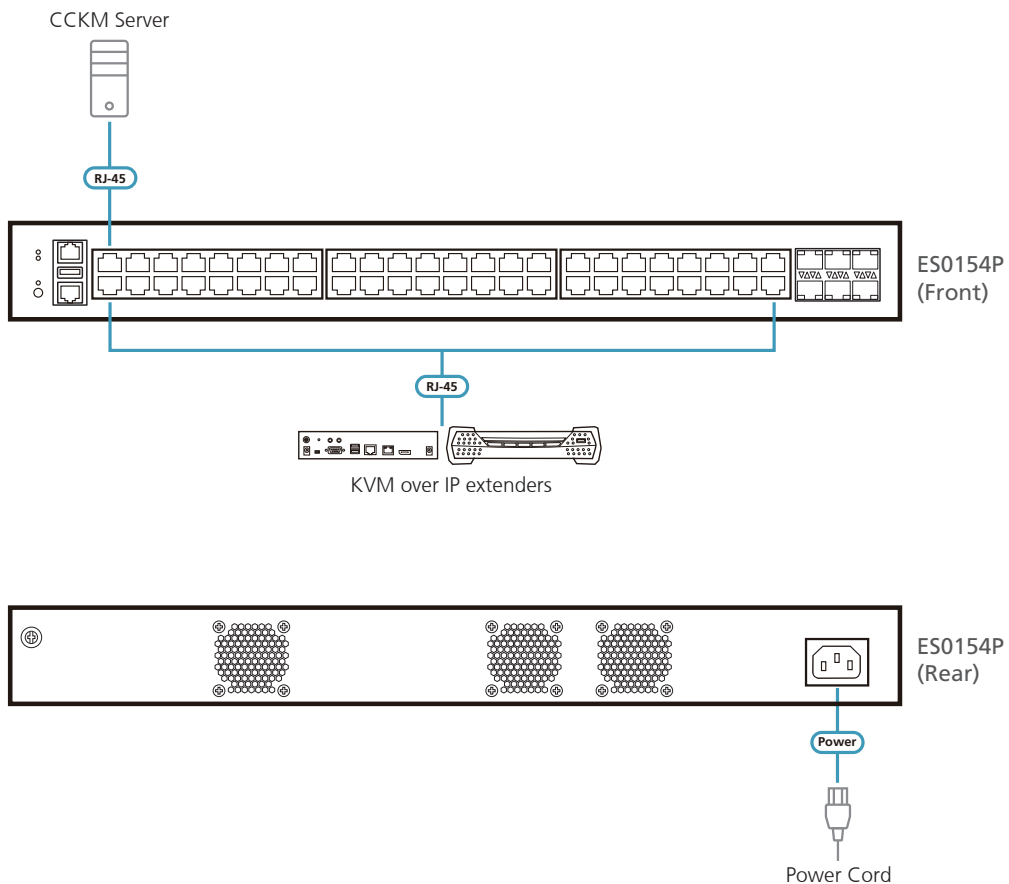

## Scenario Diagram

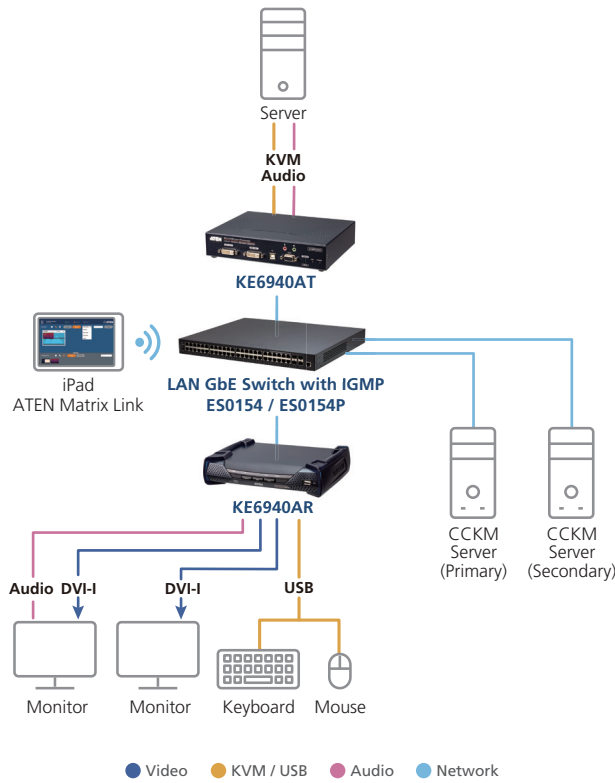

## Specifications

	ES0154	ES0154P
<b>Connectors</b>		
RJ-45 10/100/1000 Ports		48
SFP28 Uplink Ports		6
Console Ports		1 x RJ-45
Remote Console		1 x RJ-45
USB Port		1
<b>Performance</b>		
Switching Capacity		396 Gbps
Forwarding Rate		295 Mpps
Flash Memory		256 MB
DRAM		1 GB
MAC Address Table Size		32 K
Jumbo Frames		10 KB
Auto-negotiation		Yes
<b>Maximum Input Power Rating</b>	100-240V AC, 50-60 Hz	
<b>Power Consumption</b>	52W	835 W
<b>Power over Ethernet (PoE)</b>		
Standard compliance	N/A	802.3af PoE / 802.3at PoE+ / 802.3bt PoE++ (41-48 ports only)
Number of Ports That Support PoE/PoE+	N/A	48 ports
Total PoE Power budget	N/A	740 W
Max. PoE Power budget per port	N/A	PoE : 15.4W/ PoE+: 30W / PoE++: 90W (41-48 ports only)
<b>Environmental</b>		
Operating Temperature	-5 – 45 °C	
Storage Temperature	-40 – 70 °C	
Humidity	5 – 95% RH, Non-condensing	
<b>Physical Properties</b>		
Rack Space	19"	
Housing	Metal	
Weight	4.68 kg	5.42 kg
Dimensions (L x W x H)	44.20 x 42.00 x 4.36 cm	

### ATEN International Co., Ltd.

3F., No.125, Sec. 2, Datung Rd., Sijhih District., New Taipei City 221, Taiwan  
 Phone: 886-2-8692-6789 Fax: 886-2-8692-6767  
 www.aten.com E-mail: marketing@aten.com

Product information is subject to change without prior notice.

Released: 11/2023 V1.0

© Copyright 2023 ATEN® International Co. Ltd.  
 ATEN and the ATEN logo are registered trademarks of ATEN International Co., Ltd.  
 All rights reserved. All other trademarks are the property of their respective owners.

