

1

2





3

4



5

6

Total length (optional)

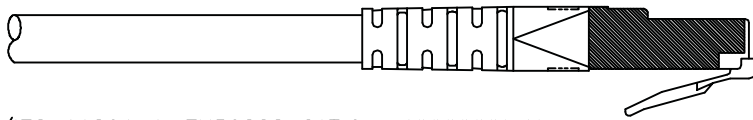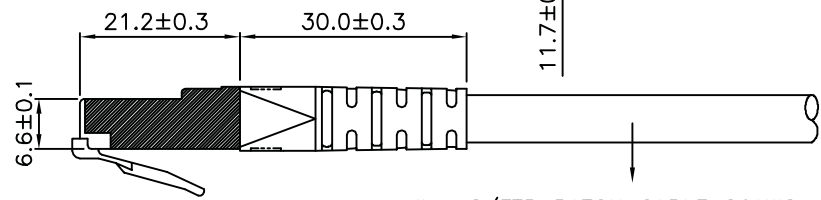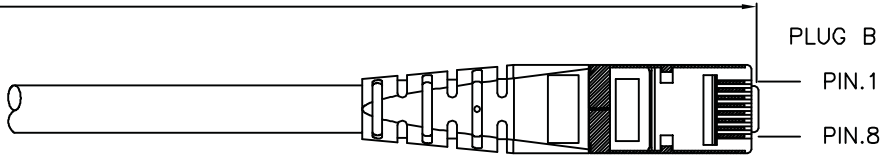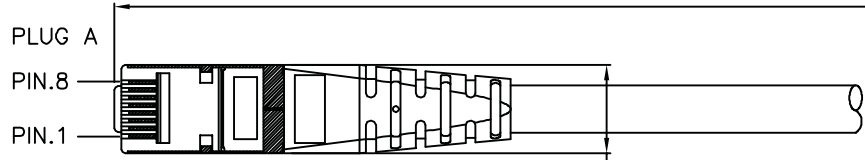

roline S/FTP PATCH CABLE 26AWG 4PR ISO/IEC 11801 & EN50288 CAT.6 XXXXXXXX-X

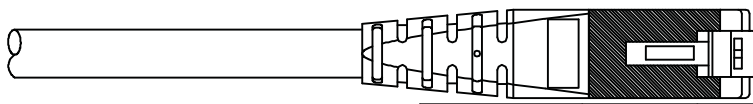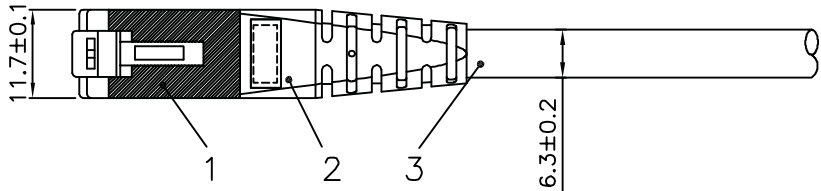

- (1) Jacket Color : Orange(RAL2003)
- (2) Wiring:T568B

item no.	length	tolerance
21.15.1317	0.3M	+20 -0
21.15.1327	0.5M	+20 -0
21.15.1337	1M	+20 -0
21.15.0821	1.5M	+20 -0
21.15.1347	2M	+20 -10
21.15.1357	3M	+20 -10
21.15.1367	5M	+30 -20
21.15.1377	7M	+30 -20
21.15.1387	10M	+30 -20
21.15.1397	15M	+30 -20
21.15.1407	20M	+70 -30

Specification :

Material :

- RJ45 Plug :
 - Housing : Polycarbonate,Transparent color.
 - Contact material : Phosphor Bronze with 50-60 micro-inch Nickel plated.
 - Contact finished : Min. 50 micro-inch Gold plated on surface contact area.
 - Shield : Bronze with Nickel plated.
- Molding : PVC.
- Cable :
 - Jacket : PVC.
 - Conductor : 26 AWG stranded copper.
 - Isolation : PE.
 - Shield : Aluminum Foil Shielded for Each Pair, Tin Copper Braid.
- Cable structure : S/FTP, 4 twisted pair.
- Minimum Bending Radius: 50mm

item no	21.15.1317	21.15.1327	21.15.1337	21.15.0821	21.15.1347
	21.15.1357	21.15.1367	21.15.1377	21.15.1387	21.15.1397

Desc						ROLINE Cat 6 S/FTP Patch Cord,Orange					
"#" : Matching DIM.		DRAWING		23.JuL.2016		byz					
"*" : Important DIM.		CHECK		23.JuL.2016		Jane					
Others General DIM.		APPROVAL		23.JuL.2016		Jaimy					
GENERAL TOLERANCE OF DIMENSIONS		DATE		NAME							
X.XXX ±0.005		SCALE		1/1 (A4)		UNIT		mm			
X.XX ±0.05		DRAWING NO.									
X.X ±0.1		DRAWING CLASSIFICATION		S		SHEET		1 OF 1			

No.	MODIFIED AREA	ORIGINAL	MODIFY	DATE	MODIFIER