



Datenblatt - Fiche technique - Data sheet



**21.15.2563**



ROLINE Patchkabel Kat.6 UTP, Component Level, LSOH, weiss, 3,0 m

Cordon ROLINE UTP Cat.6, LSOH, Component Level, blanc, 3,0 m

ROLINE UTP Cable Cat.6 Component Level, LSOH, white, 3.0 m

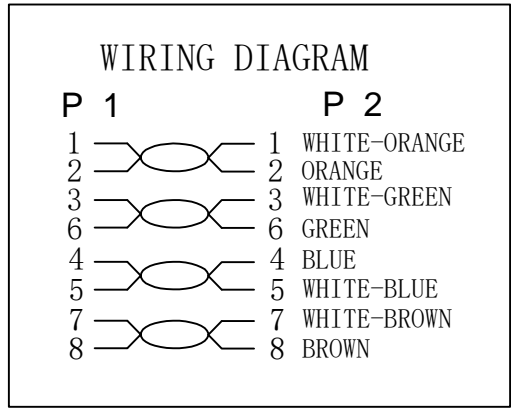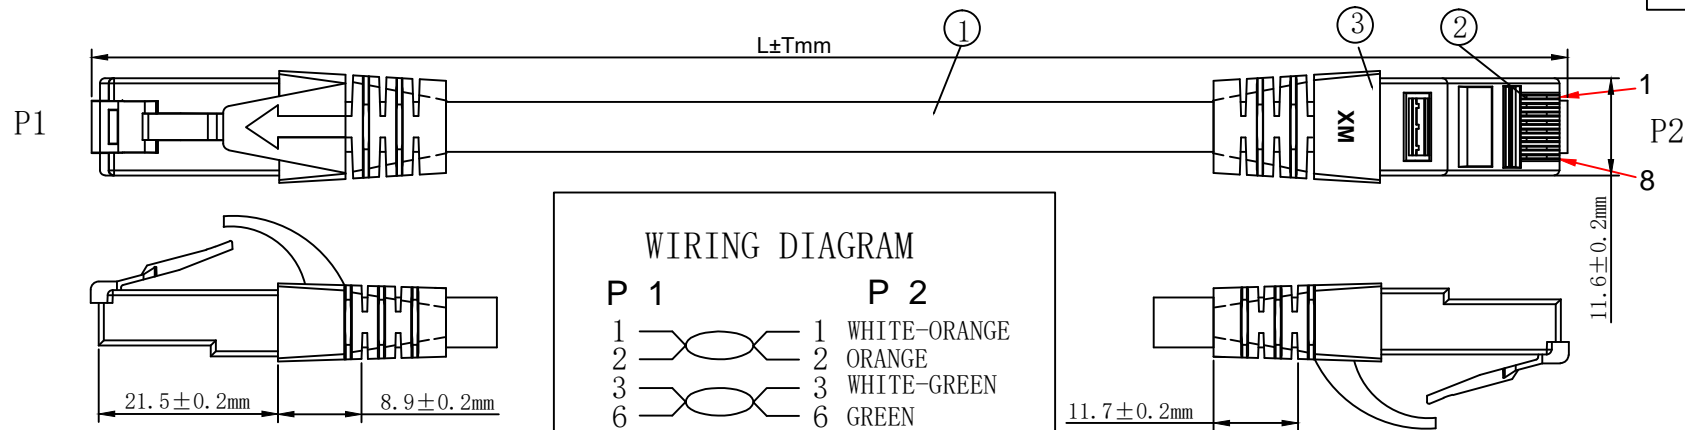

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 U/UTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

3. 100% Component Patch cord Test PASS

4. Minimum bending radius:50mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC White	2PCS	
②	CONNECTOR	RJ45 8P8C'S UNSHIELDED PIN GOLD PLATED 3u", Transparent RED	2PCS	
①	CABLE	U/UTP CAT.6 24AWG (BC*1P)*4+CROSS + JACKET LSOH OD=6.0±0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:White

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2946	300mm	±10mm
21. 15. 2560	500mm	±15mm
21. 15. 2561	1000mm	±30mm
21. 15. 2564	1500mm	±45mm
21. 15. 2562	2000mm	±60mm
21. 15. 2563	3000mm	±90mm
21. 15. 2565	5000mm	±150mm
21. 15. 2566	7500mm	±210mm
21. 15. 2567	10000mm	±300mm
21. 15. 2568	15000mm	±450mm
21. 15. 2569	20000mm	±600mm

ITEM NO.	21. 15. 2946	21. 15. 2560	21. 15. 2561	21. 15. 2562	21. 15. 2563
21. 15. 2564	21. 15. 2565	21. 15. 2566	21. 15. 2567	21. 15. 2568	21. 15. 2569
DESC.	ROLINE UTP PatchCord CAT. 6, LSOH, Comp. Level, White				

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.
		NEW	2016-10-20	A

**SECOMP**