




Datenblatt - Fiche technique - Data sheet



**21.15.2631**

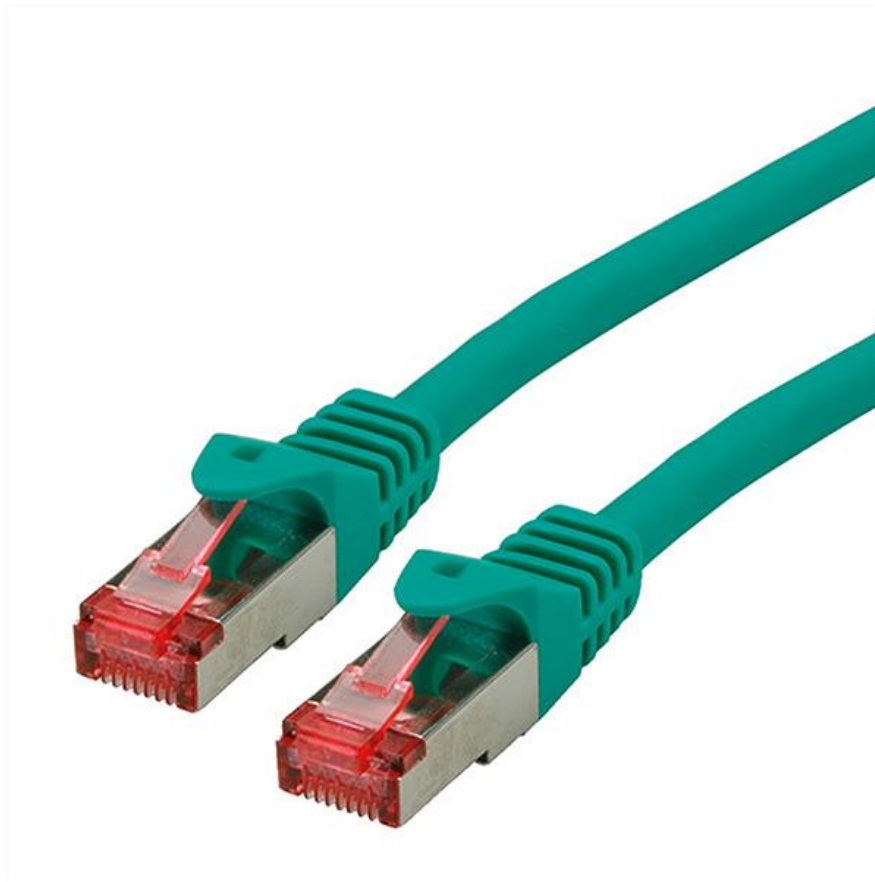

ROLINE Patchkabel Kat.6 S/FTP (PiMF), Component Level, LSOH, grün, 1,0 m

Cordon ROLINE S/FTP(PiMF) Cat.6, LSOH, Component Level, vert, 1,0 m

ROLINE S/FTP Patch Cord Cat.6 Component Level, LSOH, green, 1.0 m

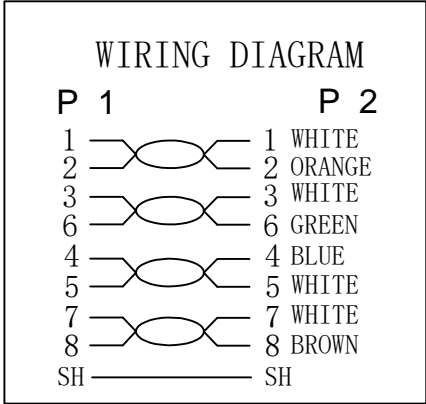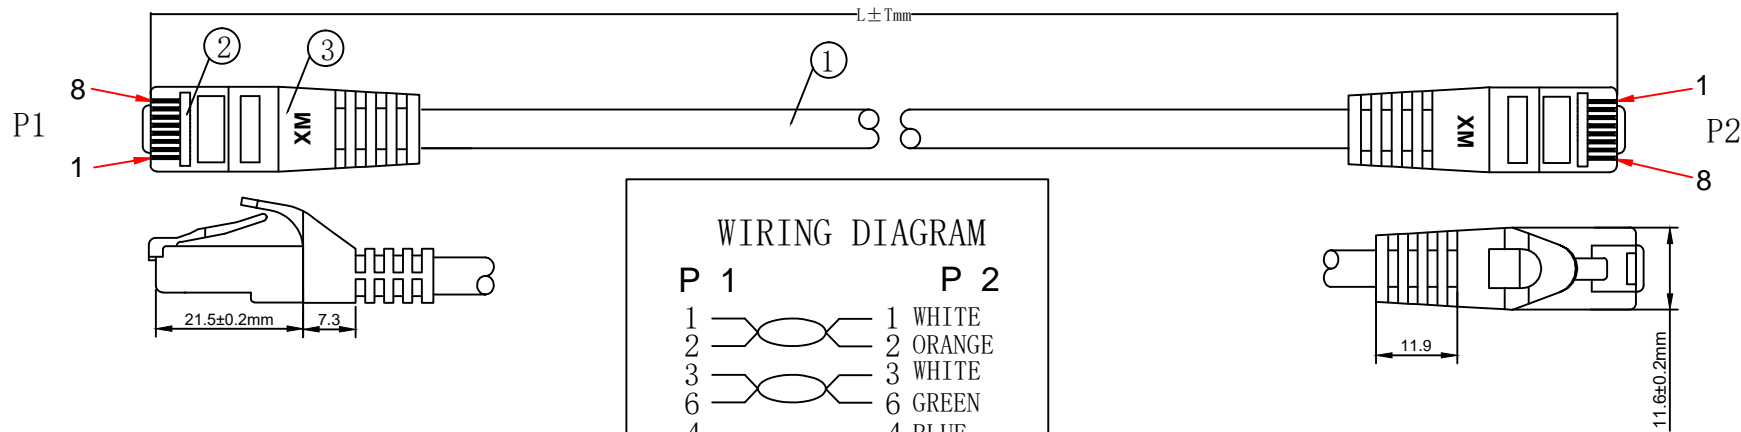

**1. ELECTRICAL TEST:**

- (1). 100% OPEN SHORT & MISS WIRE TEST;
- (2). INSULATION RESISTANCE:DC 250V 20M OHM MIN;
- (3). CONTACTOR RESISTANCE:30 OHM MAX

2. PRINTING:GHMT® roline CAT.6 S/FTP COMPONENT PATCH CORD LSZH 250MHz ISO/IEC 11801 & EN 50173-1 & ANSI/TIA-568-C.2

- 3. 100% Component Patch cord Test PASS
- 4. Minimum bending radius:60mm

**MATERIAL LIST**

⑥	LABEL	NO DRY GLUE LABEL	1PCS	
⑤	MINI TIE	PE MINI TIE (POSSESS METAL)	2PCS	
④	POLYETHYLENE BAG	POLYETHYLENE BAG	1PCS	
③	OVER MOLD	88A PVC Green	2PCS	
②	CONNECTOR	RJ45 8P8C'S SHIELDED PIN GOLD PLATED 3u", SHELL PLATED NICKEL Transparent RED	2PCS	
①	CABLE	S/FTP CAT.6 26AWG (BC*1P+AL-FOIL)*4P+BRAID CABLE JACKET LSOH OD=6.2 ± 0.2MM	1PCS	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

COLOUR:Green (PANTONE:3278C)

ITEM NO.	LENGTH (L)	TOLERANCE (T)
21. 15. 2954	300mm	± 10mm
21. 15. 2630	500mm	± 15mm
21. 15. 2631	1000mm	± 30mm
21. 15. 2634	1500mm	± 45mm
21. 15. 2632	2000mm	± 60mm
21. 15. 2633	3000mm	± 90mm
21. 15. 2635	5000mm	± 150mm
21. 15. 2636	7500mm	± 210mm
21. 15. 2637	10000mm	± 300mm
21. 15. 2638	15000mm	± 450mm
21. 15. 2639	20000mm	± 600mm

ITEM NO.	21. 15. 2954	21. 15. 2630	21. 15. 2631	21. 15. 2632	21. 15. 2633
21. 15. 2634	21. 15. 2635	21. 15. 2636	21. 15. 2637	21. 15. 2638	21. 15. 2639
DESC.	ROLINE S/FTP PatchCord CAT. 6, LSOH, Comp. Level1, Green				

**SECOMP**

BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

NEW 2016-10-20 A