



PIN OUT

CN1 (568B)      CN2 (568B)

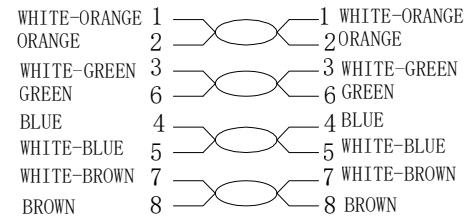

NOTE:

- ELECTRICAL TEST:100% OPEN SHORT, MISS WIRE TEST
- FLUKE Channel TEST:  
TEST LIMIT:ISO11801 Channel Class Ea
- Working temperature:-20°C~+75°C  
Storage temperature:-20°C~+80°C
- RoHS AND REACH compliant
- PRINT WORD:CAT6A U/UTP 4x2x26AWG/7 RECYCLED PVC ISO11801 & EN50173 & ANSI/TIA568.2-D
- Minimum of the bending radius is 4\*OD (Suitable for all meters)

MATERIAL LIST:

③	OVER MOLD	RECYCLED PVC GREEN PANTONE 3278C	2	
②	PLUG	RJ45 8P8C UNSHIELDED PLUG, PIN GOLD PLATED 3U", COLOUR:TRANSPARENT GREEN	2	
①	CABLE	CAT.6A U/UTP CABLE (26AWG BC*1P)*4P JACKET:RECYCLED PVC GREEN PANTONE 3278C OD:4.2±0.2MM	1	
NO.	PARTS NAME	SPECIFICATION DESCRIPTION	QT'Y	REMARK
		NEW	2023-11-30	A
BY	CHK	REVISION RECORD MODIFICATIONS	DATE	REV.

21.45.3139	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 20m	20000±300	53.40%
21.45.3138	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 15m	15000±300	51.0%
21.45.3137	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 10m	10000±300	50.9%
21.45.3136	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 7m	7000±150	50.9%
21.45.3135	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 5m	5000±100	50.8%
21.45.3133	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 3m	3000±50	50.8%
21.45.3132	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 2m	2000±30	50.7%
21.45.3134	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 1.5m	1500±30	50.6%
21.45.3131	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 1m	1000±20	50.5%
21.45.3130	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 0.5m	500±20	50.5%
21.45.3184	ROLINE RECYCLED UTP PatchCord Cat6A/Cl.EA, green, 0.3m	300±10	50.4%
ITEM NO.	DESC.	LENGTH (mm)	The proportion of RECYCLED certification materials

