
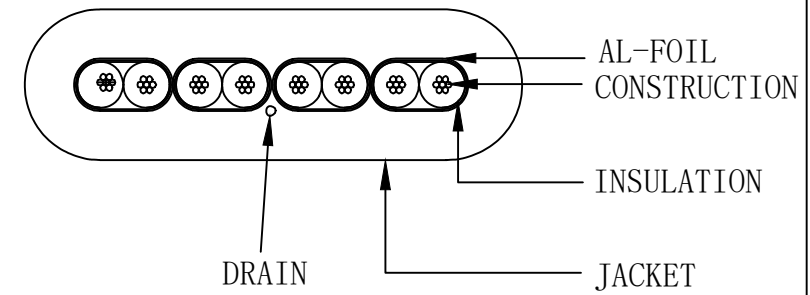


WIRING DIAGRAM

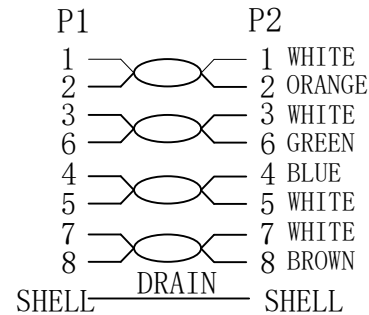

NOTE:

- 100% OPEN SHORT, MISS WIRE TEST
- Fluke test
Test limit: ISO 11801 CHANNEL CLASS EA
- PRINT WORD: CAT6A U/FTP FLAT 4x2x32AWG/7 PVC ISO11801 & EN50173 & ANSI/TIA568C. 2
- ROHS2.0 AND REACH COMPLIANT

MATERIAL LIST

③	OVER MOLD	PVC Colour Grey (RAL7035)	2	
②	CONNECTOR	RJ45 8P8C shielded Plug, Pin Gold Plated, Transparent Blue	2	
①	CABLE	(32AWG BC*1P+AL-FOIL)*4+E JACKET: PVC OD: 2.0 ± 0.2 * 6.5 ± 0.2 mm Grey (RAL7035)	1	
NO.	PARTS NAME	SPECIFICATION STANDARD	QT' Y	REMARK

ITEM	LENGTH
21.99.2110	500 ± 30mm
21.99.2111	1000 ± 30mm
21.99.2114	1500 ± 50mm
21.99.2112	2000 ± 50mm
21.99.2113	3000 ± 70mm
21.99.2115	5000 ± 70mm

DESC. VALUE Cat.6A FTP PatchCord grey

NEW

2019-07-03

A

BY CHK

REVISION RECORD MODIFICATION

DATE

REV.

SECOMP