



Datenblatt - Fiche technique - Data sheet



21.99.3049




VALUE Junction Box Kat.6A, STP

VALUE Module de liaison Cat.6A, STP

VALUE Junction Box Cat.6A, STP

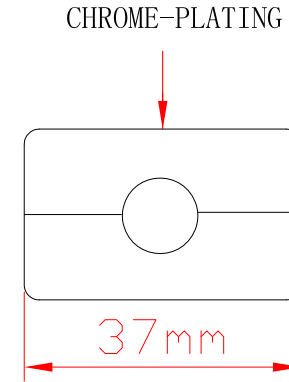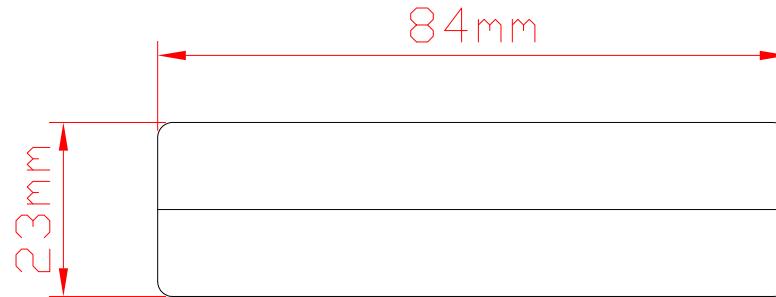

A ↑

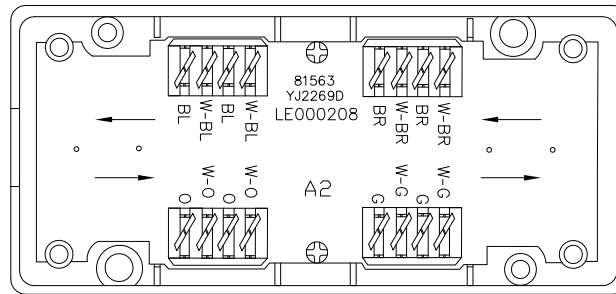

OPEN TOP

TOP

NOTES:

ELECTRICAL:

1. VOLTAGE RATING: 125 VAC RMS
2. CURRENT RATING: 1.5 AMP
3. CONTACT RESISTANCE: 100MILLIOHMS MAX
4. INSULATION RESISTANCE: 100 MEGOHMS MIN @500 VDC
5. DIELECTRIC STRENGTH: 750 VAC RMS 60Hz, 1MIN

ENVIRONMENTAL:

1. STORAGE: -40°TO+85°
2. OPERATION: 0°TO70°

MECHANICAL:

1. HOUSING MATERIAL: PC SILVER CHROME-PLATING
2. PCB MATERIAL: FR-4 T=1.6mm
3. IDC MATERIAL: PC, CONTACT: PHOSPHOR BRONZE; WITH NICKEL PATING;
4. IDC LIFE: 200 TIMES MIN;

					SECOMP							
					Material			Item No.	21.99.3049			
					Angles Projection			Size	Scale			
					Unit			DWG No.	00-01			
Drawn	Ding jian bo	2015.12.28	Signature		Date			A4	X:1	mm	Part Name	Cat.6A STP connection box
Checked	Ge pei jun	2015.12.28	Signature		Date			Version: A/0		ERP		
Approved	Wang wei jun	2015.12.28	Signature		Date			Sheet	1 OF 1	Part No.		
					Tolerance							
					0.00-20.00	±0.10						
					20.00-50.00	±0.15						
					50.00-100.00	±0.20						
					100.00-	±0.25						
					Angle	±30°						