

19-inch wall housing Pro „two-part swivelling“

roline[®]
Designed for Professionals

Data sheet



The ROLINE Pro series wall-mounted enclosures have been specially designed for flexible network cabling. Thanks to the integrated hinge in the rear frame allows the enclosure to be folded to the side if required. Each enclosure has a sliding cable inlet with a foam rubber seal in the roof. Each enclosure consists of a robust steel construction made of up to 1.5 mm thick sheet steel and is electrostatically powder-coated in the standard colours grey (RAL 7035) and black (RAL 9005).

Characteristics:

- Load capacity: 80 kg
- Front door made of tempered glass, lockable
- 1-point locking system on the front door
- Housing is connected to the rear frame with a separate lock
- Cable feed at the rear and base
- Side panels are lockable and removable
- Roof with cut-out for fan modules
- Ventilation slots for passive ventilation and extraction
- incl. mounting material
- Colour: Light grey, RAL 7035 or Jet black, RAL 9005
- IP protection class: IP20
- Mounted: Yes

19-inch wall housing Pro „two-part swivelling“

roline[®]
Designed for Professionals

Data sheet

The ROLINE Pro series offers a versatile selection of two-part swivelling wall-mounted enclosures in various height units from 7 U to 20 U and in the colours grey (RAL 7035) and black (RAL 9005).

Manuf. no.	Height	Width (mm)	Depth (mm)	Colour / RAL
26.21.0010	7 U	600	600	grey / RAL 7035
26.21.0180	7 U	600	600	black / RAL 9005
26.21.0011	9 U	600	600	grey / RAL 7035
26.21.0181	9 U	600	600	black / RAL 9005
26.21.0012	12 U	600	600	grey / RAL 7035
26.21.0182	12 U	600	600	black / RAL 9005
26.21.0013	16 U	600	600	grey / RAL 7035
26.21.0183	16 U	600	600	black / RAL 9005
26.21.0014	20 U	600	600	grey / RAL 7035
26.21.0184	20 U	600	600	black / RAL 9005

19-inch wall housing Pro „two-part swivelling“

roline[®]
Designed for Professionals

Data sheet



Tempered glass front door




Rear panel with cable feed



Removable side panels



Integrated locking cylinder

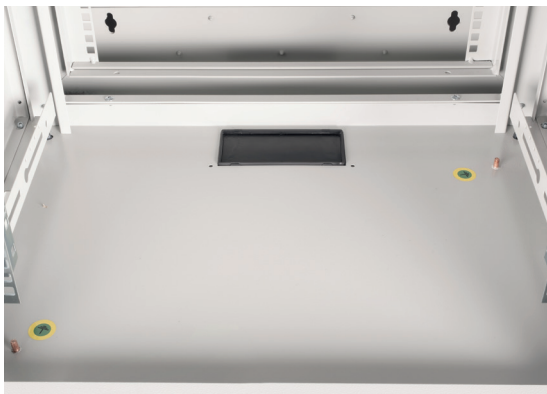

Base plate with cable feed



Roof with cut-outs for ventilation